

**NEW!**

**THE ONLY OFFICIALLY APPROVED FIRE RATED LADDER ON THE MARKET**



A specially designed ladder hinge controls the movement of the hatch so that during opening the ladder automatically shifts away from the hatch for improved comfort of the user.

The last step of the ladder is positioned high in the box which provides safe and convenient use of the attic ladder mounted even in a thick ceiling.

The triple - seal system fitted in the box provides excellent tightness.


Insulation thickness: 2 7/8"



# ATTIC LADDER LWF - FIRE RATED

The LWF fire rated ladder provides easy access to an attic while functioning as a blaze block in case of fire. The hatch is manufactured with the use of fireproof materials and is equipped with a gasket that expands under extreme heat. **The LWF ladder is fire rated at 43 minutes** in accordance with **ASTM E119** and **30 minutes** in accordance with **NFPA 288**.

## DIAGRAM

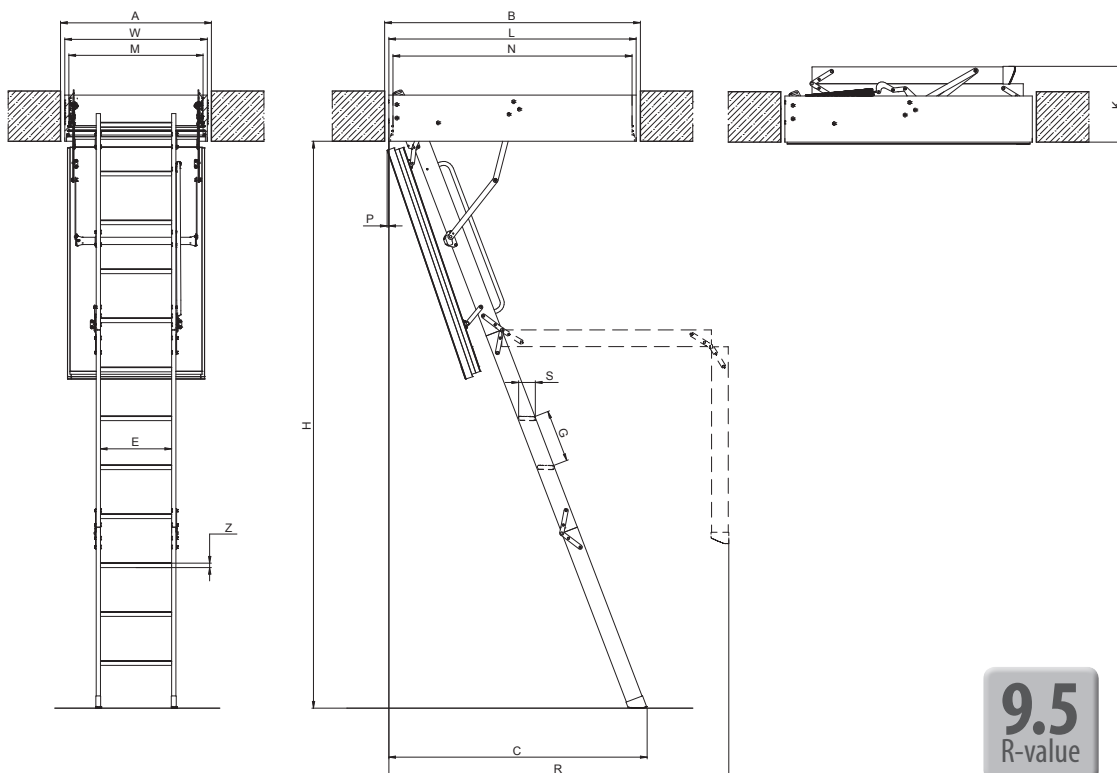






**9.5**  
R-value

max  
300  
lbs

**2** year  
warranty

## ATTIC LADDER DIMENSIONS

						
<b>LWF</b>		22½"x47"	25"x47"	22½"x54"	25"x54"	30"x54"
Ceiling height	H	7'5" - 8'11"		7'11½" - 10'1"		
Rough opening	AxB	22½"x47"	25"x47"	22½"x54"	25"x54"	30"x54"
Outside frame dimensions	WxL	22"x46⅝"	24½"x46⅝"	22"x53½"	24½"x53½"	29½"x53½"
Internal dimensions	MxN	20½"x44⅞"	23"x44⅞"	20½"x51¾"	23"x51¾"	28"x51¾"
Projection	R	67"		73¼"		
Landing space	C	59"		65¼"		
Distance between steps	G	9⅞"		10½"		
Step length	E	13¼"				
Step width	S	3⅞"				
Step thickness	Z	7⁄8"				
Folded ladder height	K	15"				
Frame height		8⅝"				
Board movement after opening	P	1"				
Approx. weight (lbs)		98	104	105	110	123

 fireproof hatch in white

 plastic ends

 three peripheral seal

 non-slip steps

 handrail

 additional accessories available

**FAKRO®**



**FAKRO AMERICA**  
39 West Factory Road  
Addison, IL 60101  
tel: 630 / 543-1010  
fax: 630 / 543-1011  
www.fakrousa.com  
e-mail: sales@fakrousa.com

Available only in sizes given above.