

FAKRO INSULATED SMART ATTIC LADDERS

WOODEN

LWN (OLN)

250 lbs (119 kg)
22½ x 47 – 7'5" - 8'11"
25 x 47 – 7'5" - 8'11"
22½ x 54 – 7'10" - 10'1"
25 x 54 – 7'10" - 10'1"
30 x 54 – 7'10" - 10'1"



LWP (LWS-P)

300 lbs (136 kg)
22½ x 47 – 7'5" - 8'11"
25 x 47 – 7'5" - 8'11"
22½ x 54 – 7'10" - 10'1"
25 x 54 – 7'10" - 10'1"
30 x 54 – 7'10" - 10'1"
22½ x 54 – 8'8½" - 10'8"
25 x 54 – 8'8½" - 10'8"
30 x 54 – 8'8½" - 10'8"



R-Value 5.9

LWF (US, CA Certified)

Fireproof Door
300 lbs (136 kg)*
22½ x 47 – 7'5" - 8'11"
25 x 47 – 7'5" - 8'11"
22½ x 54 – 7'11½" - 10'1"
25 x 54 – 7'11½" - 10'1"
30 x 54 – 7'11½" - 10'1"



R-Value 9.5

LWT Thermo

300 lbs (136 kg)
22½ x 47 – 7'5" - 8'11"
25 x 47 – 7'5" - 8'11"
22½ x 54 – 7'8" - 10'1"
25 x 54 – 7'8" - 10'1"
30 x 54 – 7'8" - 10'1"



R-Value 12.5

LWS-M Basic

300 lbs (136 kg)
27 x 47 – 7'2" - 8'11"



R-Value 5.2

METAL

OWM

300 lbs (136 kg)
22 x 47 – 7'2" - 8'11"
25 x 47 – 7'2" - 8'11"
22 x 54 – 7'11" - 10'1"
25 x 54 – 7'11" - 10'1"
30 x 54 – 7'11" - 10'1"



LMS

350 lbs (159 kg)
22 x 47 – 7'2" - 8'11"
25 x 47 – 7'2" - 8'11"
22 x 54 – 7'11" - 10'1"
25 x 54 – 7'11" - 10'1"
30 x 54 – 7'11" - 10'1"



R-Value 5.2

SCISSORS

LST

300 lbs (136 kg)*
22 x 31 – 7'6½" - 9'2¼"
27 x 31 – 7'6½" - 9'2¼"
22 x 47 – 7'6½" - 9'2¼"
25 x 47 – 7'6½" - 9'2¼"
22 x 54 – 7'6½" - 9'2¼"
25 x 54 – 7'6½" - 9'2¼"



LSF

Fireproof Door
300 lbs (136 kg)*
22 x 47 – 7'10½" - 9'10"
25 x 47 – 7'10½" - 9'10"



max. 10'6"
with one extra LSS step

R-Value 5.2

max. 10'10"
with two extra LSS steps

* according to European Standard

Accessories

Attic balustrade LXB-U



Top safety handrail LXH



Wooden trimming



PVC trimming




Plastic ends LXS



Additional step LSS for scissors ladders



Insulated upper hatch LXW-B




See
other
side



FAKRO SKYLIGHTS, ROOF WINDOWS, HATCHES

FAKRO Energy Star, Low-E, leakproof skylights feature an internal gasket that minimizes the effects of condensation. Virtually maintenance-free, the thick frame is professionally finished on the inside with a double clear coat. Easy one-person installation. A full range of flashings allows installing the skylights with all types of roofing materials. Additional accessories bring together both style and function.

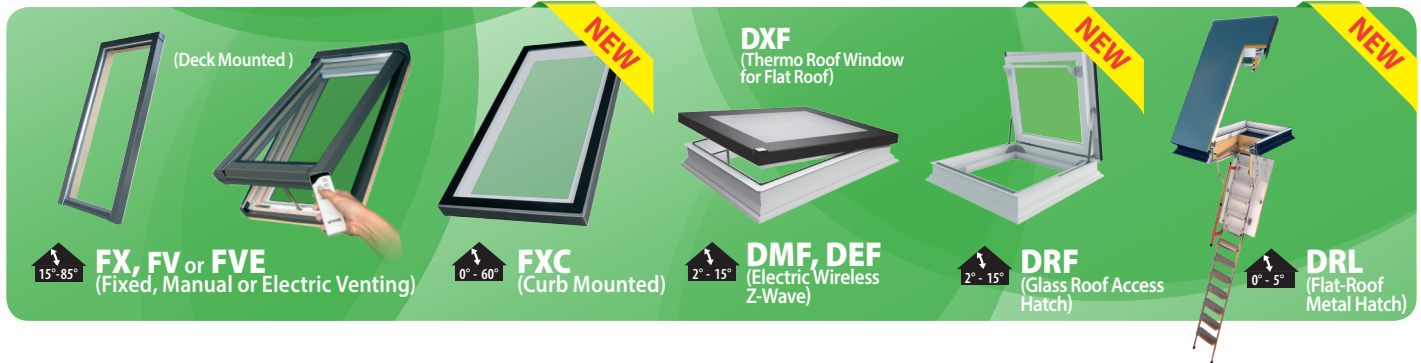

SKYLIGHT FX, FV, FVE sizes


Size	106 (16/46)*	301 (24/27)	304 (24/38)	306 (24/46)**	308 (24/55)**	312 (24/70)**	504 (32/38)	506 (32/46)	508 (32/55)**	801 (48/27)	806 (48/46)
Rough opening	in. 14 1/2 x 45 1/2	22 1/2 x 26 1/2	22 1/2 x 37 1/2	22 1/2 x 45 1/2	22 1/2 x 54	22 1/2 x 70	30 1/2 x 37 1/2	30 1/2 x 45 1/2	30 1/2 x 54	46 1/2 x 26 1/2	46 1/2 x 45 1/2
	mm 364 x 1157	568 x 678	568 x 957	568 x 1157	568 x 1376	568 x 1776	771 x 957	771 x 1157	771 x 1376	1177 x 678	1177 x 1157

SKYLIGHT FXC sizes

Size	(22/22)	(22/30)	(22/34)	(22/46)	(22/70)	(30/30)	(30/46)	(34/34)	(34/46)	(46/46)
Outside curb	in. 25 1/2 x 25 1/2	25 1/2 x 33 1/2	25 1/2 x 37 1/2	25 1/2 x 49 1/2	25 1/2 x 73 1/2	33 1/2 x 33 1/2	33 1/2 x 49 1/2	37 1/2 x 37 1/2	37 1/2 x 49 1/2	49 1/2 x 49 1/2
	mm 648x648	648x851	648x952	648x1257	648x1867	851x851	851x1257	952x952	952x1257	1257x1257

ROOF WINDOW sizes

Size	30/46 78x118 (cm)	30/55 78x140 (cm)
Rough opening	in. 32 1/4 x 48 1/4	32 1/4 x 56 3/4
	mm 817 x 1221	817 x 1441

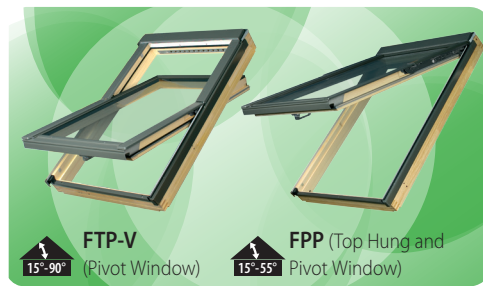

FAKRO roof windows allow converting a space or attic into a comfortable and beautiful living area. Our Roof Escape emergency exit windows are egress approved, providing peace of mind and security. FAKRO roof windows combine a solid design with elegant beauty and functionality.

ROOF ACCESS WINDOW sizes

Size	24/38	24/46**	37/46
Rough opening	in. 22 1/4 x 37 1/3	22 1/4 x 45 1/4	38 1/2 x 47 3/4
	mm 564x948	564x1148	977x1215
Outside frame	in. 23 1/2 x 38 1/2	23 1/2 x 46 1/4	36 7/8 x 46 1/4
	mm 597x975	597x1175	937x1175



LIGHT TUNNELS sizes

Light tunnels are an excellent choice in every home when bringing natural light into dark interiors. We offer light tunnels with flexible and rigid tubing.

Size	250mm 10"	350mm 14"	550mm 22"
SR_-L	+	+	+
SF_-L	-	+	+



Size	250mm 10"	350mm 14"	550mm 22"	850mm**** 33"
SRT	+	+	+	+
SLT	-	+	+	-



* this size available for the FX skylight only
 ** available in one package with EL flashing
 *** test result for the whole roof window (FTT U8 Thermo) with EHV-AT Thermo flashing testing compliant with EN ISO 12567-2, **equivalent R-Value 9.8**
 **** for roof pitch 0-15 degrees only