




Features:

- suitable for roof pitches between 0-60 degrees
- infinity glass – virtually frameless surface
- low-emission and heat-reflecting double glazing or triple glazing with argon gas
- white finished PVC frame interior
- warm spacer increases condensation resistance
- channel built into the inner frame of the skylight collects moisture and drains it to the outside
- hardware included (bit torx t20 and installation screws #10 x 2 in.)

TECHNICAL SPECIFICATION

Deck Mounted Fixed Skylight PDX



I. APPLICATION

Installation	0°-60°
	0°-14° (no flashing required) 15°-60° (EL-D or EH-D flashing required)
	deck mounted

II. FEATURES

Inner frame material	Multi chamber, insulated PVC frame with white finish (EPS insulation)
Outer frame material	Aluminum with black finish (powder coated, RAL9005)
Glazing	G53 Low-E laminated, triple-pane glazing unit with warm TGI spacer and argon gas
Warranty	10 years for skylights 20 years for laminated glass against hail (restrictions apply)

III. TECHNICAL PARAMETERS

Technical parameters	Glazing unit type		
	Unit	G53	Rating
U-factor	[BTU/h ft²F]	0.29	NFRC 100 / NFRC 200
Solar Heat Gain Coefficient	-	0.17	NFRC 100 / NFRC 200
Air Leakage	[cfm/ft²] @ 1,57 psf, tested size 46x46	-	NAFS 2017 & CSA A440S1:19
Visible Transmittance	-	0.33	NFRC 100 / NFRC 200
UV protection	-	99.8	EN 410-2011
Condensation Resistance	-	67	NFRC 100 / NFRC 200
Water Penetration Resistance Test Pressure	[Pa]	720	NAFS 2017 & CSA A440S1:19

IV. ADDITIONAL PRODUCTS TO BE USED

Flashings	EH-D - for roof tiles, corrugated metal and standing seam EL-D - for shingles and shakes
Ice and Water Guard	- FAKRO Euroband or similar self-adhesive underlayment
Internal accessories	- SRF blackout blind, SRP light reducing blind

V. ENERGY MODELING DATA


U-factor breakdown

Component	U (Btu/hr·ft ² ·°F)	U (W/m ² ·K)
Overall product	0.29	1.64
Center of glazing (U _{center})	0.25	1.39
Edge of glazing (U _{edge})	0.30	1.70
Frame (U _{frame})	0.37	2.08

SHGC breakdown

Component	SHGC
Overall product	0.172
Center of glazing (SHGC _c)	0.235
Frame component (SHGC _f)	0.010

VI. DIMENSIONS

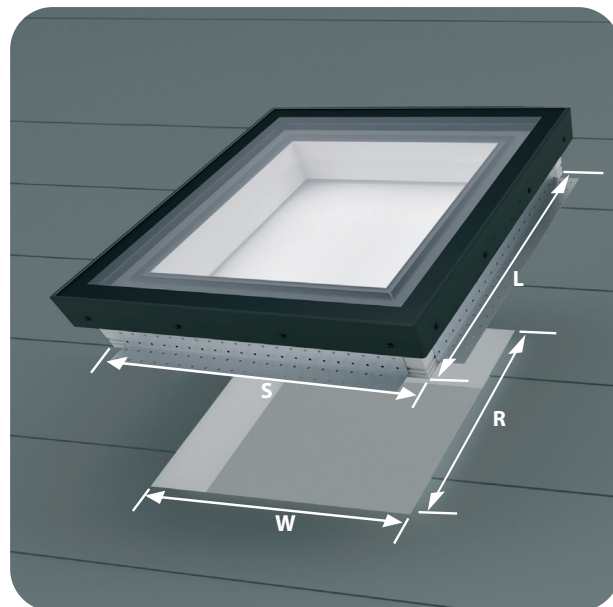

Size	14 1/2 x 45 3/4	21 x 26 7/8	21 x 37 7/8	21 x 45 3/4	21 x 54 7/16	21 x 70 1/4	30 1/16 x 37 7/8	30 1/16 x 45 3/4	30 1/16 x 54 7/16	44 1/4 x 26 7/8	44 1/4 x 45 3/4
Rough opening (WxR)	14 1/2 x 45 3/4	21 x 26 7/8	21 x 37 7/8	21 x 45 3/4	21 x 54 7/16	21 x 70 1/4	30 1/16 x 37 7/8	30 1/16 x 45 3/4	30 1/16 x 54 7/16	44 1/4 x 26 7/8	44 1/4 x 45 3/4
Frame external size (SxL)	20 x 51	26 1/4 x 32 1/8	26 1/4 x 43 1/8	26 1/4 x 51	26 1/4 x 59 5/8	26 1/4 x 75 1/2	35 1/4 x 43 1/8	35 1/4 x 51	35 1/4 x 59 5/8	49 1/2 x 32 1/8	49 1/2 x 51

